
Overview

HP Stream 11 Pro G3 Notebook PC

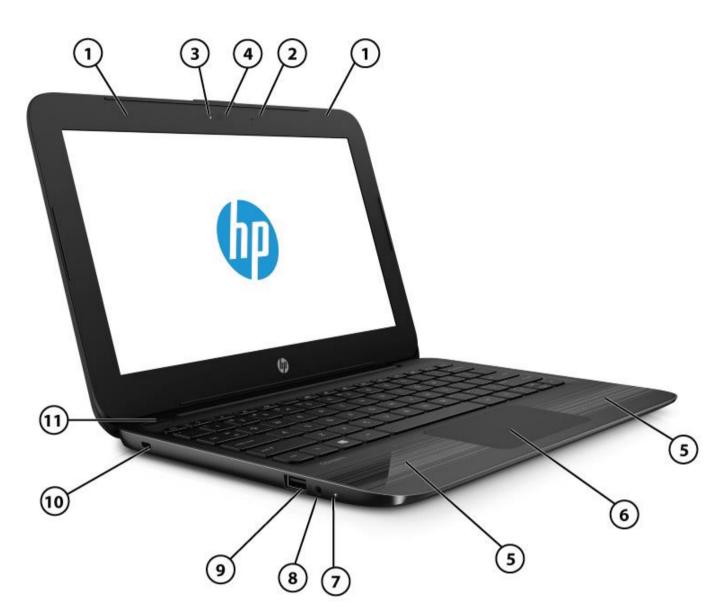

1. WLAN antenna

- 2. Microphone
- 3. Webcam LED
- 4. Webcam
- 5. Internal Speakers (2)
- 6. Clickpad with multi-touch gestures support

Front

- 7. Power LED
- 8. Headphone / Microphone in Combo Jack
- 9. USB 2.0 Port
- 10. Security lock slot
- 11. Power Button



Overview



- 1. HDMI Port
- 2. USB 3.0 Port
- 3. microSD Card Reader

- Right
 - 4. AC plug LED
 - 5. AC adapter plug



Overview

At A Glance

- Pre-installed with Windows 10 editions
- Powered by Intel[®] Celeron[®] N3060 processor
- 11.6" diagonal HD WLED anti-glare (1366x768) display
- Storage options with eMMC configurations up to 64 GB to run programs locally
- Memory options up to 4GB for enhanced memory management
- Intel[®] Dual Band Wireless AC 7265 802.11 ac (2x2) WiFi + Bluetooth[®] 4.2 Combo
- Weight starting at 1.10 kg (2.57 lbs) 1.8 cm (0.71 in) thin
- HDMI port for connecting to high-resolution displays
- HP Webcam VGA camera with integrated microphone
- Enhanced security TPM 2.0 discrete chip
- Battery life up to 10 hours and 45 minutes¹

NOTE 1: (Windows 10 MM14 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.)

NOTE: See important legal disclosures for all listed specs in their respective features sections.



Features

PRODUCT NAME

HP Stream 11 Pro G3 Notebook PC

OPERATING SYSTEM

Preinstalled

Windows 10 Pro 64¹ Windows 10 Pro 64 (National Academic only)¹

 Not all features are available in all editions or versions of Windows of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See http://www.windows.com/.

PROCESSORS

Intel® Celeron® N3060 with Intel HD Graphics 400 (1.6 GHz, up to 2.48 GHz, 2 MB cache, 2 cores)¹

Multicore is designed to improve performance of certain software products. Not all customers or software
applications will necessarily benefit from use of this technology. Performance and clock frequency will vary
depending on application workload and your hardware and software configurations. Intel's numbering is not a
measurement of higher performance. Performance and clock frequency will vary depending on application workload
and your hardware and software configurations. Intel's numbering is not a
measurement of higher performance.

CHIPSET

Chipset is integrated with processor

GRAPHICS

Integrated Intel[®] HD¹ Graphics 400 Support HD Decode, DX11, and HDMI 1.4b

1. HD content required to view HD images.



Features **DISPLAY**

Internal

(29.4 cm) 11.6" diagonal HD¹ SVA LED anti-glare(1366x768)

External

Up to 32-bit per pixel color depth HDMI² 1.4v supports up to 1920 x 1080 @ 60 Hz

- 1. HD content required to view HD images.
- 2. HDMI cable sold separately. **NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage eMMC Configurations 32 GB 64 GB

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 980 MB (for Windows 10) is reserved for system recovery software.

MEMORY

Standard

DDR3L-1600 (Transfer rates up to 1600 MT/s) Single Channel Support (For 2 GB) Dual Channel Support (For 4 GB) On board (Customer non-accessible)

2 GB (256 MB x 16 x 4 pcs) 4 GB (256 MB x 16 x 8 pcs)¹

1. Not available with 32 GB eMMC

Maximum 4 GB

Dual-channel

Maximized dual-channel performance requires on board memory design of the same size and speed in both memory slots.



Features **NETWORKING/COMMUNICATIONS**

Wireless¹

Intel® Dual Band Wireless - AC 7265 802.11 ac (2x2) WiFi + Bluetooth® 4.2 Combo

Internal Card Expansion

One M.2 slot for WLAN

1. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

AUDIO/MULTIMEDIA

Audio

Two integrated stereo speaker Headphone / microphone in combo jack

Webcam¹

VGA camera Fixed (no tilt) + activity LED, 1 PC, USB 2.0, M-JPEG 640x480 by 24 frames per second Single digital microphone with noise suppression HP Noise Cancellation support

Internet access required.
 HD content required to view HD images.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

Full sized black textured Island-style keyboard (No numeric keypad)

Clickpad

Clickpad with image sensor Multitouch gestures enabled Default on: 2-finger scroll, pinch, rotate, 2-finger click, 3-finger flick Support modern Trackpad gestures Taps enabled as default



Features **SOFTWARE AND SECURITY**

Software

Buy Office¹ Optional HP Touch Point Manager ² HP ePrint³ HP Support Assistant⁴ HP JumpStart

1.

Security Lock slot (Lock sold separately) TPM 2.0 McAfee Checkbox McAfee LiveSafe⁵

1. Sold separately or as an optional feature.

2. HP Touchpoint Manager requires purchase of a subscription and supports Android[™], iOS and Windows 7 or higher operating systems and PCs, notebooks, tablets and smartphones from various manufacturers. Not available in all countries see www.hp.com/touchpoint for availability information.

HP ePrint requires an internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/businessmobileprinting.
 Internet access required.

Internet access required to receive updates. First update included. Subscription required for updates thereafter.

POWER

Power Supply HP 45W Smart AC adapter

Primary Battery

HP 2-cell (37 Whr) Polymer battery Support battery fast charge

Battery life¹ Up to 10 hours and 45 minutes¹

System Standby Time² TBD

- Windows 10 MM14Battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.
- 2. Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

WEIGHTS & DIMENSIONS



Features

Weight Starting at 2.57 lbs (1.17 kg)

Dimensions (w x d x h) 30.0 x 20.56 x 1.8 cm 11.81 x 8.09 x .71 in

NOTE: Weight varies by configuration and components.



Features

PORTS/SLOTS

Ports

USB 3.0 Ports – One (Right side) USB 2.0 Ports – One (Left side)

USB 2.0/3.0 Allocation:

2 for the unit 1 for Camera 1 for WLAN Combo 1 AC Smart Pin adapter plug

HP Multi-Format Digital Media Reader

Support micro SD/SDHC/SDXC up to UHS-104 (up to 2TB) Push-Push Insertion/Removal

NOTE: All cables are sold separately.

SERVICE AND SUPPORT

HP 1 year limited warranty. 1 year limited warranty on primary battery. On-site service and optional extended service contracts are also available. Optional¹ HP CarePacks² are extended service contracts which go beyond your standard limited warranties. For more details, visit: http://www.hp.com/go/lookuptool.

- 1. Sold separately or as an optional feature.
- 2. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: http://www.hp.com/go/cpc.



Technical Specifications **SYSTEM UNIT**

Stand-Alone Power	Nominal Operating Voltage	≥ 19.5V
Requirements (AC Power)	Average Operating Power	
	Max Operating Power	< 45W
Temperature	Operating	41° to 95° F (5° to 35° C)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	40 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Planned Industry Standard	UL	Yes
Certifications	FCC Compliance	Yes
	ENERGY STAR [®]	Yes
	EPEAT	Yes
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes, now for "RCM"
	CCC	Yes
	Japan VCCI Compliance	Yes
	KC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes, now call "CU" or "EAC"
	CIT	No idea
	GOST	Yes, now call "CU" or "EAC"
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes
	UKRSERTCOMPUTER	Yes



Technical Specifications **DISPLAYS**

11.6" diagonal HD WLED Anti-Glare	Outline Dimensions (W x H x D)	278.5 x 168.5 x 3.6	mm max.
(1366x768) flat (3.6mm),	Active Area	256.125 x 144.0mn	n typ.
SVA	Weight	235g max.	
	Diagonal Size	11.6 inch	
	Contrast Ratio	300:1	
	Refresh Rate	60Hz	
	Brightness	220nits typ.	
	Pixel Resolution	Format	1366 x 768
	Pixel Resolution	Configuration	RGB Stripe
	Interface	eDP	
	LCD Mode	TN	
	PPI	135	
	Viewing Angle	40/40/15/30	

NETWORKING/COMMUNICATIONS

Intel® Dual Band Wireless - AC 7265 802.11 ac (2x2)	Wireless LAN Standards	IEEE 802.11a
WiFi + Bluetooth® Combo		IEEE 802.11b
		IEEE 802.11g
		IEEE 802.11n
		IEEE 802.11ac
	Interoperability	Wi-Fi certified
	Frequency Band	802.11b/g/n
		• 2.402 – 2.482 GHz Note:

The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

802.11a/n

- 4.9 4.95 GHz (Japan)
- 5.15 5.25 GHz
- 5.25 5.35 GHz
- 5.47 5.725 GHz



Technical Specifications

incutions	
	• 5.825 – 5.850 GHz
	Note: Indonesia no support this band)
Data Rates	• 802.11b: 1, 2, 5.5, 11 Mbps
Data Kates	 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
	• 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and
	80MHz)
Modulation	Direct Sequence Spread Spectrum
	BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
Security ¹	 IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g
	mode only
	AES-CCMP: 128 bit in hardware
	802.1x authentication
	 WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.
	WPA2 certification
	• IEEE 802.11i
	Cisco Certified Extensions, all versions through CCX4 and CCX Lite
	• WAPI
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power ²	• 802.11b : +16dBm minimum
	• 802.11g : +14dBm minimum
	• 802.11a : +14dBm minimum
	• 802.11n HT20(2.4GHz) : +13dBm minimum
	• 802.11n HT40(2.4GHz) : +13dBm minimum
	• 802.11n HT20(5GHz) : +12dBm minimum
	 802.11n HT40(5GHz) : +12dBm minimum
	 802.11ac 80MHz(5GHz) : +11dBm minimum
Power Consumption	Transmit: 2.0 W (max)
	Receive: 1.6 W (max)
	Idle mode (PSP): 180 mW (WLAN Associated)
	Idle mode: 60 mW (WLAN unassociated)
	Radio disabled: 30 mW



Technical Specif	ications		
	Power Management	ACPI and PCI Express cor 802.11 compliant power	npliant power management r saving mode
	Receiver Sensitivity ³	802.11b, 1Mbps : -94dB	m maximum
		802.11b, 11Mbps : -86d	Bm maximum
		802.11g, 6Mbps : -88dB	m maximum
		802.11g, 54Mbps : -74d	Bm maximum
		802.11a, 6Mbps : -86dB	m maximum
		802.11a, 54Mbps : -72d	Bm maximum
		802.11n, MCS07 : -69dB	m maximum
		802.11n, MCS15 : -66dB	m maximum
		802.11ac, 1SS, MCS-0 : -	86dBm maximum
		802.11ac, 1SS, MCS-9 : -	61dBm maximum
		802.11ac, 2SS, MCS-0 : -	83dBm maximum
		802.11ac, 2SS, MCS-9 : -	58dBm maximum
	Antenna type	High efficiency antenna enclosure	with spatial diversity, mounted in the display
			nd 2.4/5 GHz antennas are provided to the card to nmunications and Bluetooth communications
	Form Factor	PCI-Express M.2 MiniCar	d
	Dimensions	Туре 2230: 2.3 х 22.0 х 3	30.0 mm
	Weight	Type 2230: 2.8g	
	Operating Voltage	3.3v +/- 9%	
	Temperature	Operating Non-operating	14° to 158° F (–10° to 70° C) –40° to 176° F (–40° to 80° C)
	Humidity	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)
	Altitude	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)



Technical Specifications

LED Activity

LED Amber – Radio OFF; LED White – Radio ON

- 1. Check latest software/driver release for updates on supported security features.
- 2. Maximum output power may vary by country according to local regulations.
- 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Bluetooth Specification	4.0+EDR Compliant		
Frequency Band	2402 to 2480 MHz		
Number of Available Channels	79 (1 MHz) available cha	nnels	
Data Rates and Throughput	: 3 Mbps data rate; throug	ghput up to 2.17 Mbps	
	Synchronous Connection	n Oriented links up to 3, 6	54 kbps, voice channels
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric		
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.		
Receiver Sensitivity	Modulation	0.01% BER	0.001% BER
	GFSK	-80 dBm	-70 dBm
	π/4-DQPSK	-80 dBm	-70 dBm
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 m	W	
Range	Up to 33 ft (10 m)		
Electrical Interface	USB 2.0 compliant		
Bluetooth Software Supported	Microsoft Windows Blue	tooth Software	
Link Topology			
Electrical Interface	Point to Point, Multipoin	t Pico Nets up to 7 slaves	5
	Full support of Bluetooth Security Provisions		



Technical Specifications

Microsoft Windows ACPI, and USB Bus Support
Self-configurable to optimize power conservation in all operating modes,
including Standby, Hold, Park, and Sniff
All necessary regulatory approvals for supported countries, including:
FCC (47 CFR) Part 15C, Section 15.247 & 15.249
ETS 300 328, ETS 300 826
Low Voltage Directive IEC950
UL, CSA, and CE Mark
Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)



Technical Specifications **AUDIO/MULTIMEDIA**

Hardware	Implementation	Realtek ALC 3227 Low Power High Definition Audio Codec
	Function Key Volume Controls	Volume up, Volume down, and Mute
	Full Duplex	Yes
	Microphone In	Mono
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, Dual Digital Microphone
Audio Output Quality	Frequency Response	20 Hz – 20KHz
	Signal to Noise Ratio	90 dB FSA (Typical)
	Total Harmonic Distortion	-80 dB FS (Typical)
	Noise Floor	-120 dB
	Play/Record Sampling Rate(s)	8KHz – 96KHz
	DAC	16, 20 or 24 bit
	ADC	16 or 20 bit
Integrated Stereo	Power Rating	2 Watts
Speakers	Impedance	4 Ohm

POWER

HP 45W AC Adapter	Dimensions Weight Input	3.74 x 1.57 x 1.04 in (9.5 x 4.0 x 2.65 cm) 0.386 lb (175g) max		
		Input Efficiency	87.74% at 115Vac and 88.4% at 230Vac	
		Input frequency range	47 to 63 Hz	
		Input AC current	1.4A at 90VAC	
	Output	Output power	45W	
		Hold-up time	5m Sec. at 115 VAC input	
		DC output	19.5V	
		Output current limit	< 8.0A	
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)	
		Non-operating (storage) temperature	-4° to 185° F (-20° to 85° C)	
		Altitude	0 to 16,400 ft (0 to 5,000 m)	
		Humidity	20% to 95%	
		Storage Humidity	10% to 95%	



Technical Specifications EMI and Safetv CE Mark - full compliance with LVD and EMC directives Certifications * Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. * MTBF - over 200,000 hours at 25°C ambient condition. HP 2-cell Polymer Battery Cells/Type 2-cell Polymer (37.69 WHr) Watt-hour capacity 37.69Whr Temperature **Operating (Charging)** 0° to 45° C Operating (Discharging) -10° to 60° C Non-operating -20° ~ 60° C (1 month) -20° ~ 45° C (3 month) -20° ~ 30° C (6 month) Warranty 1 year limited

ENVIRONMENTAL

TBD

COUNTRY OF ORIGIN

China



Options and Accessories (sold separately and availability may vary by country)

Category	Description	Part number
Cases	HP Business Top Load	H5M92AA
	HP Business Slim Top Load	H5M91AA
	HP Business Backpack	H5M90AA
	HP Essential Top Load Case (up to 15.6")	H2W17AA#xxx
Docking	HP USB 3.0 Travel Dock	TOK30AA#AC3
	HP USB 3.0 Port Replicator	H1L08AA#xxx
	HP Display and Notebook Stand II	E8G00AA#xxx
Input/Output	HP Slim USB Keyboard & Mouse	T6T83AA#xxx
	HP USB Optical Travel mouse	G1K28AA
	HP Ultrathin Bluetooth Mouse	L9V78AA
	HP Conferencing Keyboard	K8P74AA#xxx
	HP UC Speaker Phone	K7V16AA
	HP UC Wired Headset	K7V17AA
	HDMI to VGA Adapter	H4F02AA
	HP HDMI to DVI Adapter	F5A28AA
	HP USB Gigabit RJ45 Adapter	N7P47AA#xxx
Power	HP 45W Smart AC Adapter (4.5mm)	H6Y88AA#xxx
	HP 65W Slim AC Adapter	H6Y82AA#xxx
	HP 65W Smart Travel AC Adapter	JOE43AA#xxx
Storage	HP External USB Optical Drive	F2B56AA
Security	HP Keyed Cable Lock 10mm	T1A62AA



Summary of Changes

Date of change:	Version History:	Description of change:

Copyright © 2016 HP Development Company, L.P. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core, Pentium and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark owned by its proprietor and used by HP Inc. under license. ENERGY STAR is a registered trademark mark owned by the U.S. Environmental Protection Agency. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation.

