

# BRIGHT XGA PROJECTION X355



## COMPREHENSIVE I/O AND SUPERIOR PERFORMANCE



Luminous XGA Projection with 3500 lumens and 22000:1 contrast ratio



Extensive I/O support with HDMI, VGA-In, VGA-Out, Composite Video, S-Video, Audio-In, RJ-45, and USB Power



sRGB display profile dazzles with REC.709 color accuracy



Adjust the gamma output to match the color of the projection surface with Wall Color Adjustment



Low cost of ownership with 10,000 hour lamp life



The Optoma X355 is the perfect XGA projector for classrooms, small business, and training labs. With 3500 lumens and 22,000:1 contrast ratio, the X355 produces an incredibly sharp image with rich color and superior blacks. PC and Mac users can utilize the sRGB color space profile to enable rich accurate color derived from the primaries of Rec.709b HDTV specification.

Wall Color Adjustment utilizes various gamma profiles to improve brightness on projection surfaces of varying color while Edge Mask provides a smooth consistent image by eliminating soft edges and jaggies often present in low quality sources.

The X355 enhances any presentation with fantastic detail, vibrant colors, and clear readable text. A robust arsenal of inputs and powerful zoom makes the X355 ideal for installations in various education and small business environments while the 10,000 hour lamp life provides years of use before any kind of maintenance is required.

## CONNECTIVITY (May require optional accessories)



Computers



Smart Phones



Tablets



3D Blu-ray/DVD Players



Camcorders



Apple TV\*



Chromecast™

## BRIGHT XGA PROJECTION — X355

### OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	"Single 0.55" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	1024x768 XGA
Maximum Video Resolution	1600x1200 UXGA
Brightness	3500 lumens
Contrast Ratio	22000:1
Displayable Colors	1.07 Billion
Lamp Life and Type*	10000/8000/7000/6000/5000 - EDU/ECO+/ Dynamic/ECO/Bright
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	80%
Offset	115%±5%
Aspect Ratio	4:3 (native), auto, 16:9
Throw Ratio	1.48 - 1.93
Projection Distance	3.28'-32.8' (1.0-10 m)
Image Size	30.6" - 301.1"
Projection Lens	F=2.5~ 2.78, f=16.91 ~ 24 mm manual focus
Optical Zoom	1.3x
Digital Zoom	0.8 - 2.0
Audio	16W Mono Speaker
Noise Level	29dB
Remote Control	Full Function Card Sized Remote
Operating Room Temperature	41-104°F (5-40°C), 85% max humidity
Power Supply	AC input 100-240V, 50-60Hz, auto-switching
Power Consumption	239W Typical (Bright mode), 263W Max (Bright mode), 197W Typical (Eco mode), 217W Max (Eco mode) (TBC)
High Altitude	Operating Temp @ Sea Level to 10000 feet = 23C (max); must manually switch to high altitude mode @ 5000 feet & above (using OSD)

### COMPATIBILITY SPECIFICATIONS


Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Mac compatible
Video Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e. 60 or 72 frames per eye). 3D glasses are needed and are sold separately. Refer to user manual for details.
Vertical Scan Rate	24-85Hz, 120Hz
Horizontal Scan Rate	15.375-91.146KHz
User Controls	Complete on-screen menu adjustment in 26 languages
I/O Connection Ports	2xHDMI 1.4v, 2xVGA-In, VGA-Out, Composite Video, S-Video, 2xAudio-In (3.5mm), Audio- Out (3.5mm), RJ-45, USB Power, RS232C
Loop Through (Audio)	Yes

### PHYSICAL SPECIFICATIONS

Security	Kensington® lock port, security bar, keypad lock
Weight	5.29 lbs.
Dimensions (W x H x D)	11.73" x 3.79" x 9.05"



- |                 |                  |              |                     |
|-----------------|------------------|--------------|---------------------|
| 1. HDMI         | 4. VGA-out/YPbPr | 7. RJ-45     | 10. Audio In        |
| 2. USB          | 5. RS-232C       | 8. Video     | 11. Audio In/Mic In |
| 3. VGA-in/YPbPr | 6. S-Video       | 9. Audio Out | 12. Power           |

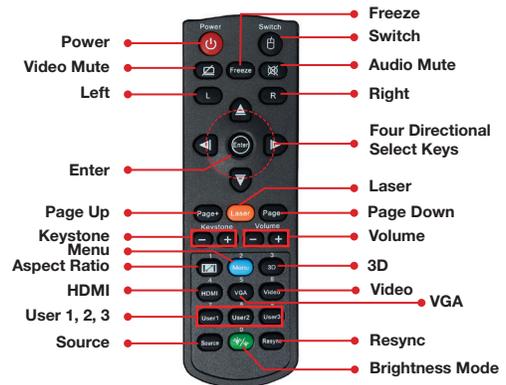

### Warranty

3-Year Optoma Express Service, 1-Year on Lamp.

### In the Box (Standard Accessories)

X355 projector, AC power cord, VGA to VGA cable, remote control, carrying case, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

### Optional Accessories

Universal ceiling mount, DLP®Link™ 3D glasses, Wireless HDMI system, Lamp, Remote

### Accessory Part Numbers

Lamp: BL-FU195A	Remote: BR5053C
DLP® Link™ 3D glasses: ZD302	Wireless HDMI system: WHD200
Universal ceiling mount: OCM818W-RU	Universal ceiling mount: BM-5001U
Universal ceiling mount (with extensional pole): OCM815W	

UPC 796435 44 022 0

\*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with DLP® Link active shutter glasses when projector is used with a compatible 3D player. Please visit [www.OptomaUSA.com](http://www.OptomaUSA.com) for more information.

[www.OptomaUSA.com](http://www.OptomaUSA.com)

Copyright © 2016 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time.