

# ST122LE

## 2-Port VGA Video Splitter - 300 MHz

## Installation Guide

### Packaging Contents

- 1 x ST122LE video splitter
- 1 x USB to DC Power adapter cable
- 1 x Installation Guide

### System Requirements

- VGA enabled video source device (i.e. computer, laptop, etc) with an available USB port
- VGA enabled display devices (i.e. monitor, projector, TV, etc)

### Installation

**NOTE:** Before connecting the splitter to the source computer and displays, you should ensure that the workspace is configured to require minimal cable between the computer and splitter, and between the splitter and the displays.

The maximum resolution you will be able to use for your application depends on cable quality and length, and how many interference-causing devices are nearby. You may not be able to use the maximum resolution at longer distances. For the best possible performance, keep the length of cable from the source computer to the splitter to 6 feet (1.8m).

1. Power down the host computer and displays that will be connected.
2. Connect the Video In connector on the splitter to the Video Out port on the host computer.
3. Using a high-quality HD-15 VGA switchbox male-to-male cable (StarTech.com part number MXT101MMHQ), connect one end of the cable to one of the Video Out ports on the splitter. Connect the opposite end to the VGA input on the display. Repeat this process for the remaining display.
4. Connect the tip on the power adapter (provided) to the power port on the video splitter. Connect the remaining end to an available USB port on the host computer.

Once you have completed the steps above, you can power on the displays and the host computer. Each will now display the image from the source computer.


#### Warranty Information

This product is backed by a one year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

#### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

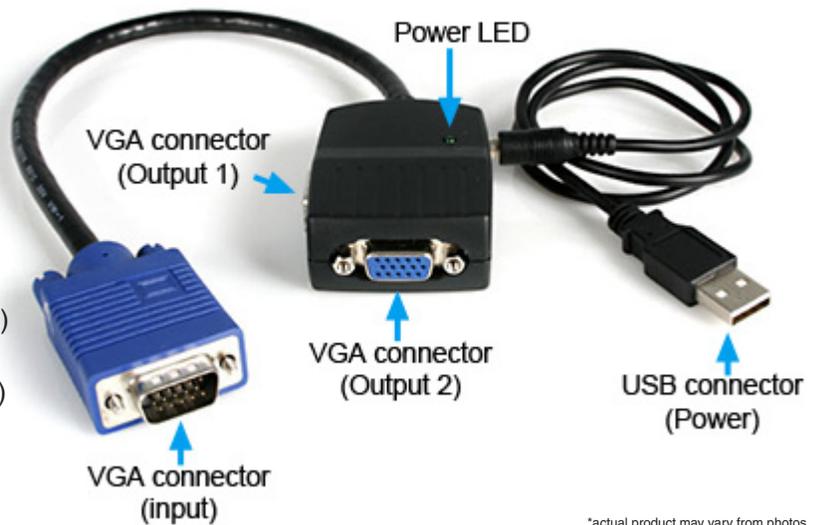

\*actual product may vary from photos

### Specifications

Video Signal	VGA (RGBHV)
Number of Ports	2
Connectors	2 x DE-15 VGA female 1 x DE-15 VGA male 1 x USB type A male
LEDs	1 x Power
Maximum Video Resolution	2048 x 1536
Video Bandwidth	300 MHz
Maximum Cable Distance	65 m / 210 ft
DDC Support	DDC, DDC2, DDC2B (Port 1 only)
Integrated Cable Length	400 mm
Operating Temperature	0°C ~ 70°C (32°F ~ 158°F)
Storage Temperature	-20°C ~ 85°C (-4°F ~ 185°F)
Humidity	0% ~ 95% RH
Dimensions	68.0mm x 46.0mm x 21.5mm
Weight	110 g