




Key Features

SuperClear MVA Panel Technology | Seamless Viewing Experience | Versatile Connectivity | Ergonomic Design | Full HD 1080p Resolution



Product Description

With future-proof connectivity and advanced ergonomics, the ViewSonic® VG2739 is a productivity-boosting monitor perfect for corporate, government, and education environments. Designed with SuperClear® MVA panel technology for wide-angle viewing and incredibly vivid colors, this monitor also features a 3-sided thin-bezel design for a seamless viewing experience in multi-monitor setups. For maximum comfort and a customized fit, a robust fully ergonomic stand gives you tilt, pivot, swivel, and height-adjustable options. In addition, VDI client endpoints can be easily attached to the stand's integrated client mount, saving desktop space and minimizing cable clutter without interfering with ergonomic functionality. Extensive connectivity options include VGA, HDMI, DisplayPort, so that you can connect to a variety of HD and analog devices – today and tomorrow.

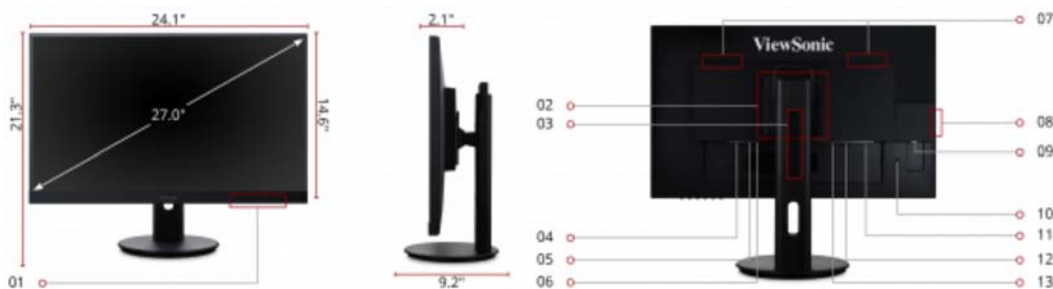


1. Menu Control Panel
2. VESA Compatible Wall Mount
(100 x 100 mm)

3. VESA Compatible Client Mount
(100 x 100 / 75 x 75 mm)
4. AC In
5. Audio In

6. Audio Out
7. Internal Speakers
8. USB 3.0 Type A (x2)
9. USB 3.0 Type B


10. Kensington Lock Slot
11. VGA
12. HDMI 1.4
13. DisplayPort



27"
DISPLAY



MVA
PANEL



1920 x 1080
RESOLUTION

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	MVA
Resolution:	1920 x 1080
Static Contrast Ratio:	3000:1
Dynamic Contrast Ratio:	80M:1
Light Source:	WLED
Brightness:	300 cd/m2
Colors:	16.7M
Color Space Support:	8-Bit+A-FRC
Aspect Ratio:	16:9
Response Time (Typical GTG):	12ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30,000
Panel Surface:	Anti-glare, Hard coating (3H)

Compatibility:

PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920 x 1080

Connector:

USB 3.0 Type A(2), USB 3.0 Type B(1), 3.5mm Audio In(1), 3.5mm Audio Out(1), VGA(1), HDMI 1.4(1), Display Port(1)

Audio:

Internal Speakers:	2W (x2)
--------------------	---------

Power:

Eco Mode (Conserve):	18
Eco Mode (optimized):	22
Consumption (typical):	27
Consumption (max):	40
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.5W

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Controls:

Physical Controls:	1,2, Up, Down, Power Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)
On Screen Display:	

Operating Conditions:

Temperature:	32-104° F (0-40° C)
Humidity (non-condensing):	20-90%

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

Video Signal:

Frequency Horizontal:	15 ~ 82KHz
Frequency Vertical:	50 ~ 75Hz

Video Input:

Digital Sync:	TMDs (HDMI 1.4), PCI-E (Display Port v1.2)
---------------	---

Ergonomics:

Height Adjust (mm):	130
Swivel:	356°
Pivot:	90°
Tilt (Forward/Back):	5°/20°

Weight (imperial):

Net (lbs):	13.56
Net Without Stand (lbs):	8.38
Gross (lbs):	17.64

Weight (metric):

Net (kg):	6.15
Net Without Stand (kg):	3.86
Gross (kg):	8

Dimensions (imperial) (WxHxD):

Packaging (in.):	28.9 x 17.87 x 7.99
Physical (in.):	24.06 x 21.26 x 9.19
Physical Without Stand (in.):	24.06 x 14.63 x 2.12

Dimensions (metric) (WxHxD):

Packaging (mm):	734 x 454 x 203
Physical (mm):	611.24 x 540.03 x 233.25
Physical Without Stand (mm):	611.24 x 371.49 x 53.74

General:

Regulations: cTUVus, FCC-B w/ ICES003, Energy Star 7.0, EPEAT Gold, UL-MX-CoC, Mexico Energy

PACKAGE CONTENTS: VG2739 Display, Power Cable (1.8m), DP to DP Cable (1.8m), USB3.0 Upstream Cable (1.8m), Quick Start Guide

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907911411

Accessories: