


VANDAL-PROOF DOME CAMERA

TP-H787VPC-MIR 1/3" Vandal-proof High Resolution Vari-focal Color Dome Camera with Mechanical IR Filter



Option: Bracket

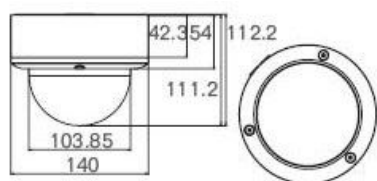

Wall Mount



Ceiling Mount

FEATURES:

- Vandal-proof case made of hard and hammer-proof material in waterproof IP66
- Color model in high resolution (550 TV Lines)
- With 2.9~10 mm Aspherical Vari-focal Day / Night Auto Iris lens
- 10 High Power IR LED for Night Viewing Range 15M
- Optional Wall / Ceiling Bracket to fit in most installation sites

SPECIFICATIONS

PICK-UP DEVICE	1/3 " Interline Transfer CCD
PICTURE ELEMENTS	NTSC: 811(H)X508(V) PAL: 795(H)X596(V)
SYNC SYSTEM	Internal sync
HORIZONTAL RESOLUTION	550 TV Lines
MINIMUM ILLUMINATION	0 LUX (IR LED ON at 2 Lux / Controlled by a CDS Sensor)
LENS	Standard: 2.9~10mm / F1.2 Aspherical Day/Night Lens Option: 9~22mm / F1.5 Aspherical Auto Iris Lens
IR LEDs	10 IR LEDs
IR WORKING DISTANCE	15 Meters
S/N RATIO	Over 50 dB (AGC Off)
BACK LIGHT COMPENSATION	ON / OFF (Switchable)
AUTO GAIN CONTROL	ON / OFF (Switchable)
F.L. (FLICKLESS)	ON / OFF (Switchable)
AES	ON / OFF (Switchable)
DC LEVEL	VR for adjusting the IRIS level of Auto Iris Lens
WHITE BALANCE	AUTO
VIDEO OUTPUT	1.0 Vp-p, 75 ohm
MAC. BREAKING STRENGTH	656.1 Kgf
WATERPROOFING CRITERION	IP66
POWER CONSUMPTION	2.3W
POWER SOURCE	DC 12V / AC 24V
WORKING TEMPERATURE	-10 °C to +50 °C
WORKING HUMIDITY	RH85% or less
DIMENSIONS	112.2 (O.D.) x 140 (H) mm
WEIGHT	950 g